

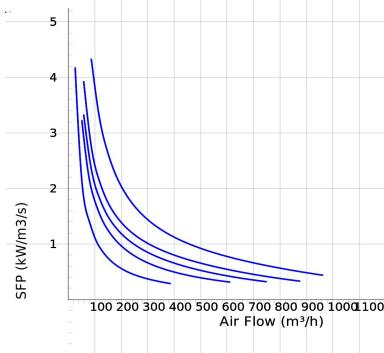


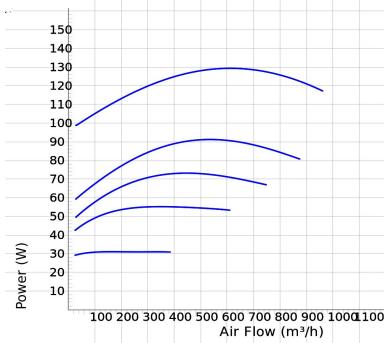

CK 200 A1

- Duct fan with circular connections.
- Proven performance and reliability.
- Compact with high capacity and efficiency.
- Low sound levels.
- Operational in both 50 and 60 Hz.
- Impeller with backward curved blades.
- The external rotor motor has maintenance-free sealed ball-bearings and is very energy efficient.
- For speed control a transformer or electronic speed controller can be connected.
- Integrated motor protection.
- Junction box has enclosure class IP 54.
- Fan housing is manufactured from galvanized sheet steel.
- The fan is intended to be installed in a duct system.
- A duct connected fan can be installed outside or in damp environments.
- Easy installation in any position.

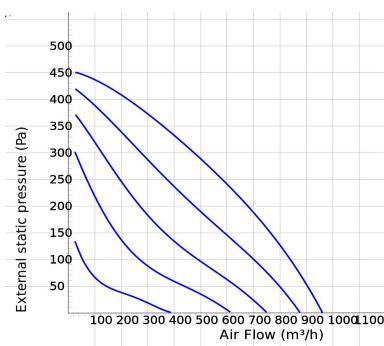

Voltage steps

1	2	3	4	5
80V	110V	135V	165V	230V

TECHNICAL DATA

7000427
CK 200 A1-v1

Voltage	230 V
Phase	1 ~
Frequency	50 Hz
Optional frequency	60 Hz
Power	129 W
Current	0.57 A
Speed	2630 r.p.m.
Max. temperature of transported air	60 °C
Max. temperature of transported air when speed controlled	60 °C
Sound pressure level at 3 m	43 dB(A)
Weight	4.1 kg
Enclosure class	44 IP
Insulation class, motor	F
Capacitor	4 µF
Duct connection	200 mm
Max. flow	961.20269136754 m³/h
Max. pressure	457 Pa
Voltage range	220-240 V

SOUND DATA	Flow (m³/h)	L _{WA} tot dB (A)	63Hz	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	8KHz
5. Surrounding L _w dB(A) 230V	583	50	17	31	40	46	46	40	38	31
5. Outlet L _w dB(A) 230V	878	76	60	62	71	69	65	68	68	60
5. Inlet L _w dB(A) 230V	878	75	54	61	68	69	65	68	67	57
4. Inlet L _w dB(A) 165V	659	71	51	59	66	66	60	63	60	51
3. Inlet L _w dB(A) 135V	540	67	48	57	61	61	55	59	54	43
2. Inlet L _w dB(A) 110V	436	62	43	53	55	55	49	58	41	34
1. Inlet L _w dB(A) 80V	295	50	34	46	44	43	39	33	24	18

DIMENSIONS

