




KVFU 315 C ErP

- Wall fan with circular inlet connection.
- KV has a square mounting plate.
- Proven performance and reliability.
- Compact with high capacity and efficiency.
- Suitable for a wide variety of applications.
- Operational in both 50 and 60 Hz.
- Impeller with backward curved blades.
- The external rotor motor has maintenance-free sealed ball-bearings.
- Integrated motor protection.
- Junction box has enclosure class IP 54.
- For speed control a transformer or electronic speed controller can be connected.
- Fan housing is manufactured from galvanized sheet steel.
- The fan is intended to be installed in a duct system, mounted on the inside wall.
- Easy installation in any position.
- Can be used in damp environments.
- This product cannot be speed controlled below 165 V.

Accessories

- VRTE C
- VRDE 1,5
- VRS 1.0
- MK 315
- BSV 315
- BSR 400
- RSK 315
- VK 400
- LDC 315

TECHNICAL DATA

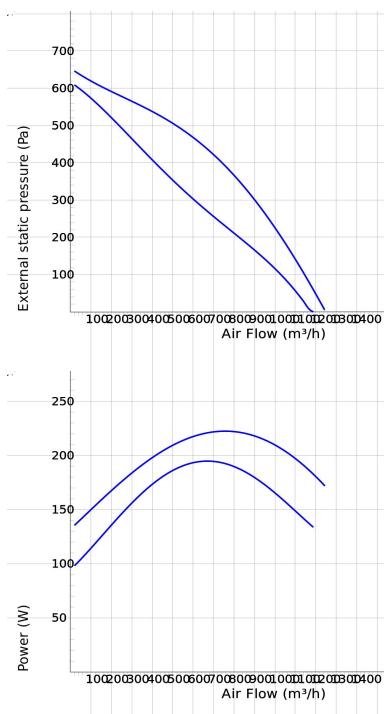

7100143
KVFU 315 C aut tp ErP 7100144
KVFU 315 C man tp ErP


Voltage	230 V	230 V
Phase	1 ~	1 ~
Frequency	50 Hz	50 Hz
Power	222 W	222 W
Current	0.97 A	0.97 A
Current 2	1.53 A	1.53 A
Current when speed controlled	1.2 A	1.2 A
Speed	2770 r.p.m.	2770 r.p.m.
Max. temperature of transported air	80 °C	80 °C
Max. temperature of transported air when speed controlled	75 °C	75 °C
Sound pressure level at 3 m	48 dB(A)	48 dB(A)
Weight	5.8 kg	5.8 kg
Enclosure class	44 IP	44 IP
Insulation class, motor	F	F
Capacitor	6 µF	6 µF
Duct connection	315 mm	315 mm
Max. flow	1249.2034977698 m³/h	1249.2034977698 m³/h
Max. pressure	657 Pa	657 Pa
Voltage range	220-240 V	220-240 V

SOUND DATA	Flow (m³/h)	L _{WA} tot dB (A)	63Hz	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	8KHz
2. Surrounding L _w dB(A) 230V	1091	55	26	44	46	47	46	49	49	38
2. Inlet L _w dB(A) 230V	972	74	52	58	64	61	66	68	68	65
1. Inlet L _w dB(A) 165V	828	71	50	56	62	59	64	66	65	63

DIMENSIONS



KVFU 315 C ErP

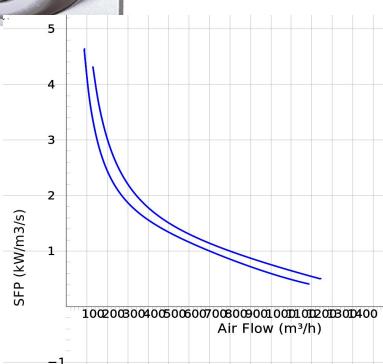

Voltage steps

1	2
165V	230V

