

SPEED CONTROLLER MS EC



MS EC for manual variable speed control of EC motors.

All fans with EC-motors from Östberg have 10 Vdc output that can be connected as supply to the controllers.

On the stepless control, Max and Min-mode can be set by adjustment screws under the knob.

On controllers with fixed locations (Steps 1-3 and Steps 0-3 Off-pos.), Pos. 1 and Pos. 2 are set by adjusting screws.

The controller is certified and approved as conforming to electrical safety and interference regulations on all markets.

Enclosure class:

Insert mounting IP 44


Surface mounting IP 54

TECHNICAL DATA

Parameter	MS EC Stepless pot. Off-pos. 9500120		MS EC Steps 1-3 9500121		MS EC Steps 0-3 Off-pos. 9500122	
	Value	Unit	Value	Unit	Value	Unit
Frequency	50	Hz	50	Hz	50	Hz
Optional frequency	60	Hz	60	Hz	60	Hz

WIRING DIAGRAM

MS EC

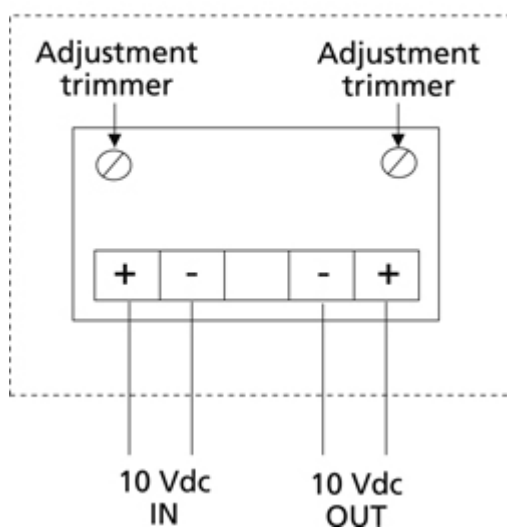

DIMENSIONS

