


EXCELLENS T STANDARD TRUNKING

TECHNICAL FEATURES

- RIGID SHOCKPROOF, UVA-PROOF AND RECYCLABLE PVC
- LENGTH 2mt
- ROUNDED BASE AND COVER
- SPRING CENTRAL COUPLING
- PRE-PERFORATED BASE FOR WALL MOUNTING
- PREPARED FOR THE INSERTION OF EASY FLOW, EASY ONE, AQUA SPLIT (DUCT T72 ONLY)

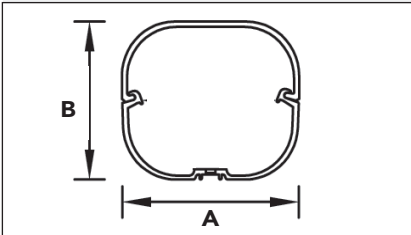

MODEL	DIMENSIONS (mm)	
	A	B
T 60 - EXC	60	52
T 72 - EXC	72	64
T 100 - EXC	98	73


THE BASE IS FIXED TO THE WALL USING THE PRE-MOLDED SLOTS (FIXING KIT IN THE CATALOGUE) THEN THE REFRIGERANT PIPES, THE CONDENSATION PIPE AND THE POWER CABLES ARE INSTALLED.


EVERYTHING IS CONTAINED BY THE **NEW "BLOCK" FIXING SYSTEM**. THE COVER **IS APPLIED QUICKLY AND EFFECTIVELY**, THROUGH A BENDING SYSTEM, **ENSURING INSULATION OF THE CONTENTS FROM WEATHERING**.

THIS IS A **SOLUTION WITH A REMARKABLE AESTHETIC EFFECT EVEN MORE ENHANCED BY THE PERFECTLY GLOSSY APPEARANCE OF THE TRUNKING AND THE ELEGANT ROUNDING THAT ELIMINATES ANY WALL DEFECTS**.

AVAILABLE IN THE VERSIONS: **TOP LINE - NEW LINE - ECO LINE - BROWN LINE - BLACK LINE**

 **MADE IN ITALY**

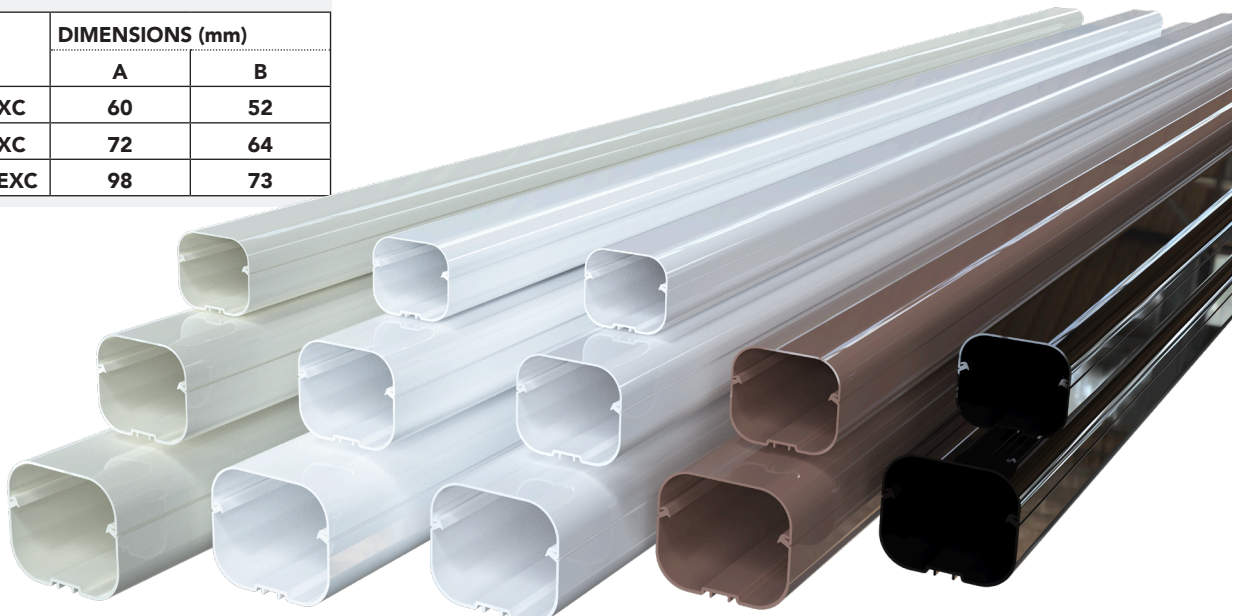


IVORY
RAL 9002
TOP LINE


WHITE
RAL 9010
NEW LINE


PEARL GREY
RAL 9003
ECO LINE




BROWN
RAL 8017
BROWN LINE


BLACK
RAL 9005
BLACK LINE





APPLICATIONS



DUCT T 60 - EXC
Suitable for mono split installation



DUCT T 72 - EXC
Suitable for mono split and dual split installation



DUCT T 100 - EXC
Suitable for up to four splits installation

MODEL	MIN. QUANTITY	TOP LINE	NEW LINE	ECO LINE	BROWN LINE	BLACK LINE
		CODE	CODE	CODE	CODE	CODE
T 60 - EXC	10 PC. = 20 mt	11120060	N11120060	E11120060	-	-
T 72 - EXC	8 PC. = 16 mt	11120072	N11120072	E11120072	SCD100006	SCD100051
T 100 - EXC	5 PC. = 10 mt	11120010	N11120010	E11120010	SCD100008	SCD100053

NEW


NEW

EXCELLENS TP STANDARD TRUNKING WITH PROTECTION FILM

NEW

TECHNICAL FEATURES

- RIGID SHOCKPROOF, UVA-PROOF AND RECYCLABLE PVC
- LENGTH 2mt
- ROUNDED BASE AND COVER
- SPRING CENTRAL COUPLING
- PRE-PERFORATED BASE FOR WALL MOUNTING
- PREPARED FOR THE INSERTION OF EASY FLOW, EASY ONE, AQUA SPLIT (DUCT T72 ONLY)
- COVER WITH BLUE CLEAR PROTECTIVE FILM IN LOW DENSITY POLYETHYLENE

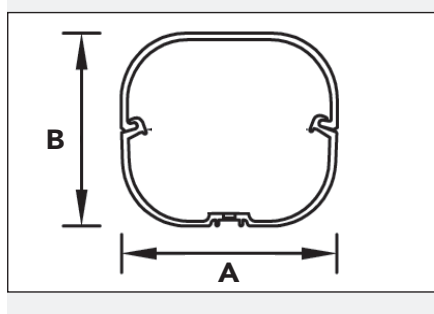


 MADE IN ITALY


WITH LOW DENSITY POLYETHYLENE PROTECTION FILM

 WHITE
RAL 9010
NEW LINE


WITH REMOVABLE FILM





TRUNKING FITTED WITH A PRACTICAL PROTECTION FILM, TO BE REMOVED ONCE THE WORK IS COMPLETED. THE REMOVABLE FILM IS USED TO PROTECT THE TRUNKING DURING INSTALLATION. ONCE THE WORK IS COMPLETED IT WILL BE REMOVED THUS ENSURING CLEANLINESS OF THE TRUNKING IT SELF.

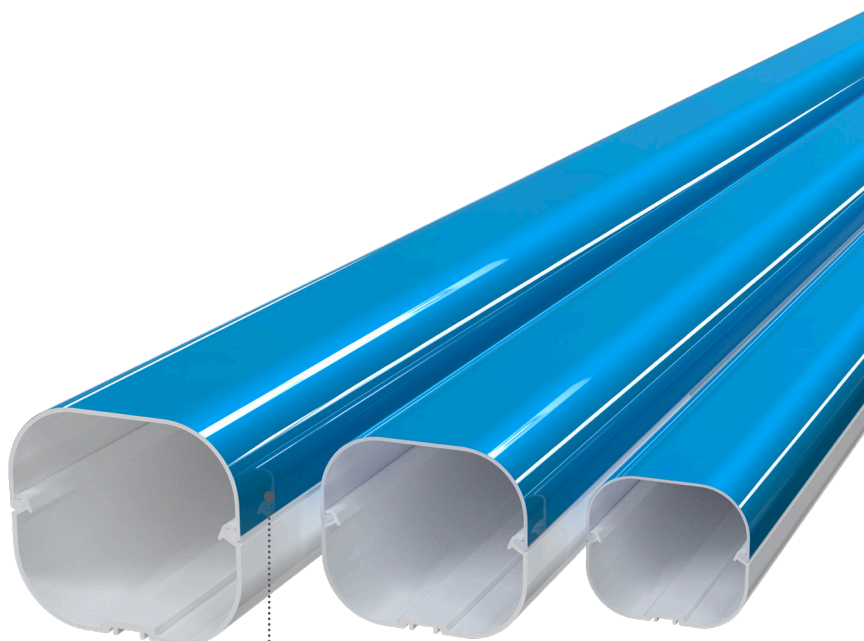




APPLICATIONS



T 60 - EXCP TRUNKING
Suitable for mono split installation



T 72 - EXCP TRUNKING
Suitable for mono split and dual split installation



T 100 - EXCP TRUNKING
Suitable for up to four splits installation

MODEL	CODE	MIN. QUANTITY	DIMENSIONS	
			A (mm)	B (mm)
TP 60 - EXC	SCD100099	10 PC. = 20 mt	60	52
TP 72 - EXC	SCD100100	8 PC. = 16 mt	72	64
TP 100 - EXC	SCD100101	5 PC. = 10 mt	98	73