



4-way ceiling cassette type (FDTC) FDTC25VH1, 35VH1

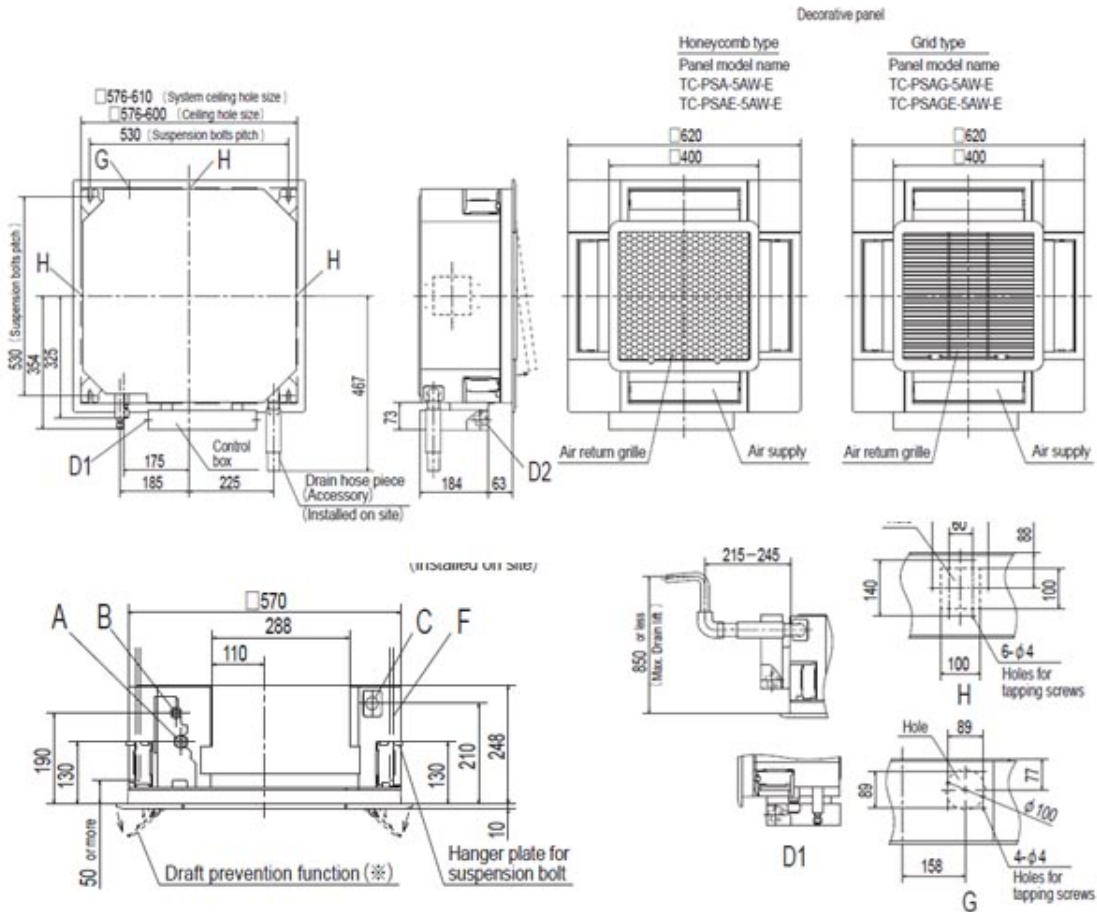

- Notes (1) The model name label is attached to the control box lid.
 (2) This unit is designed for 2×2 grid ceiling.
 If it is installed on a ceiling other than 2×2 grid ceiling, provide an inspection opening on the control box side.
 (3) Draft prevention function (※) is provided on the panel TC-PSA(G)E-5AW-E only.

Symbol	Content	
A	Gas piping	φ9.52 (3/8") (Flare)
B	Liquid piping	φ6.35 (1/4") (Flare)
C	Drain piping	VP25 (O.D.32)
D1	Power supply connection	
D2	Remote control code and signal wiring connection	
F	Suspension bolts	(M10 or M8)
G	Outside air opening for ducting	(Knock out)
H	Air outlet opening for ducting	φ125 (Knock out)
J	Inspection opening	450×450



Make a space of 4000 or more between the units when installing more than one.

