




Type: **DRAE 133-4**

Part no.: C50-13301



Curve:

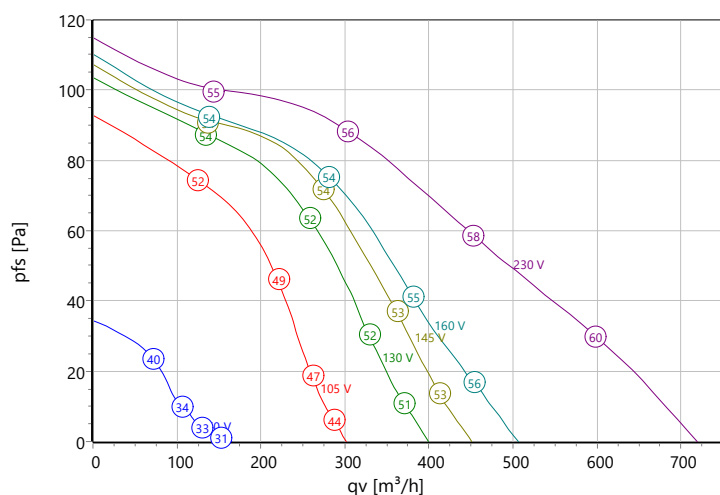

$\rho: 1,15 \text{ kg/m}^3$

Nominal Data:

U [V]	f [Hz]	C [μ F]	P _e [kW]	I _N [A]	n _N [r/min]	t _R [°C]	k ₁₀ [m ² s/h]	I _A / I _N	IP	m [kg]
230	50	2	0,09	0,38	1160	-25 .. +60	-	1,3	IP 44	3,6

Sound Data:

Frequency	Σ		125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	8kHz	Distances	1 m	4 m
LwA(B,in) [dB(A)]	-2	-	-20	-12	-10	-7	-8	-11	-17	LpA(B,in) [dB(A)]	-9	-19
LwA(B,out) [dB(A)]		-	-22	-13	-7	-4	-7	-9	-17	LpA(B,out) [dB(A)]	-7	-17


Wiring Diagram:

Einphasenwechselstrommotor mit Betriebskondensator und Thermostatschalter.
Thermostatschalter intern mit der Wicklung in Reihe geschaltet.

Single phase A.C. motor with operating capacitor and thermostatic switch.
Thermostatic switch internal wired in series with windings.

Moteur monophasé avec condensateur permanent et protecteur thermique
interne branché en série avec le bobinage.

TK3-20005 v2



U₁ blau / blue / bleu
U₂ schwarz / black / noir
Z braun / brown / brun
PE gelb-grün
yellow-green
jaun-vert

Drawing:

