

ECO125P/500 FLOW ROOF FAN



Color
Product number
LVI Code
EAN Code
Weight

Black | RR33 | RAL9005
350242
6410453502428
Gross: 6.49kg, Net: 5.62kg

Description: Energy efficient insulated roof fan with the FLOW-cowl. Uses an EC motor with a 0-10V control voltage. Includes a galvanized steel inner pipe with a lip seal and a built-in silencer. A VILPE® ECo controllers and a VILPE® pass-through chosen according to roof type and material sold separately.

Dimensions: Duct size Ø 125 mm, external Ø 225 mm, height above roof approx. 500 mm.

Contents: Roof fan, screws, installation, operating and maintenance instructions.




ECO125P/500 FLOW ROOF FAN

TECHNICAL SPECIFICATIONS

Duct size	125 Ø
Voltage	230V/50Hz
Current	0,75 A
Rotation speed (rpm)	3200 rpm
Power	83 W
Fan type	DC




ECO125P/500 FLOW ROOF FAN

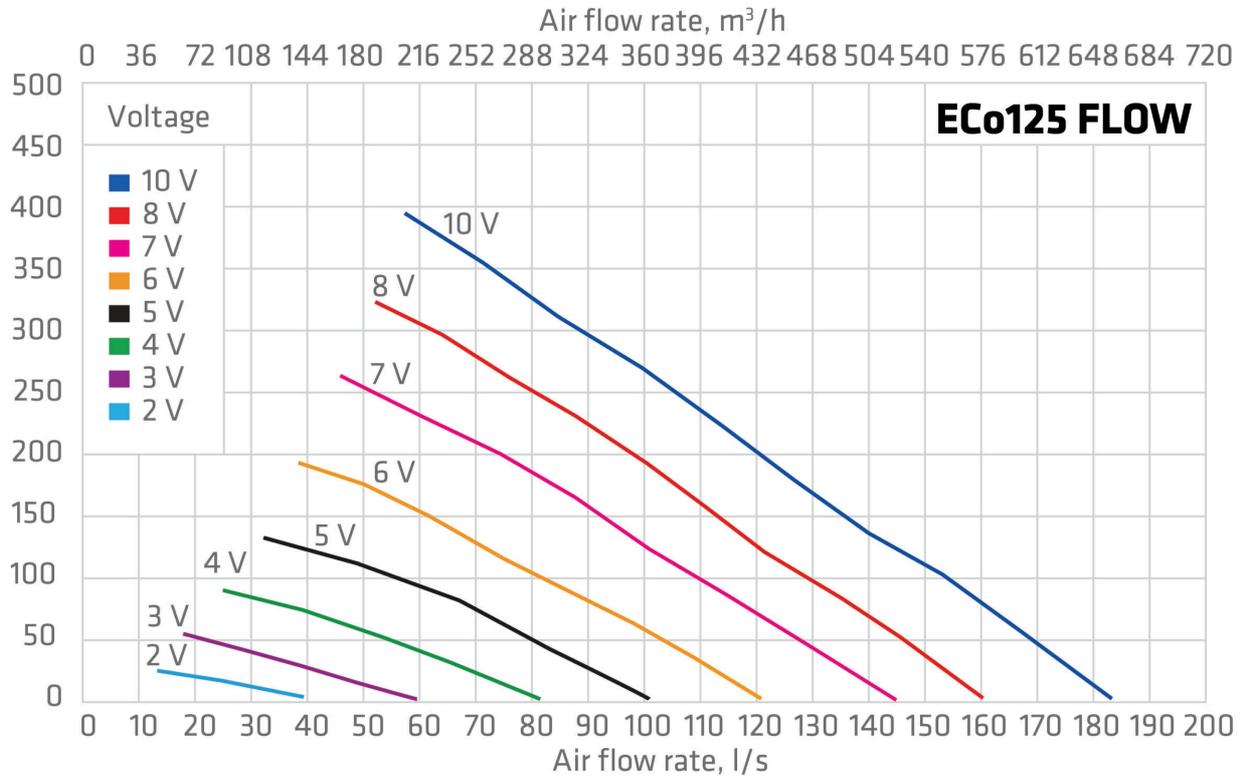



ECO125P/500 FLOW ROOF FAN

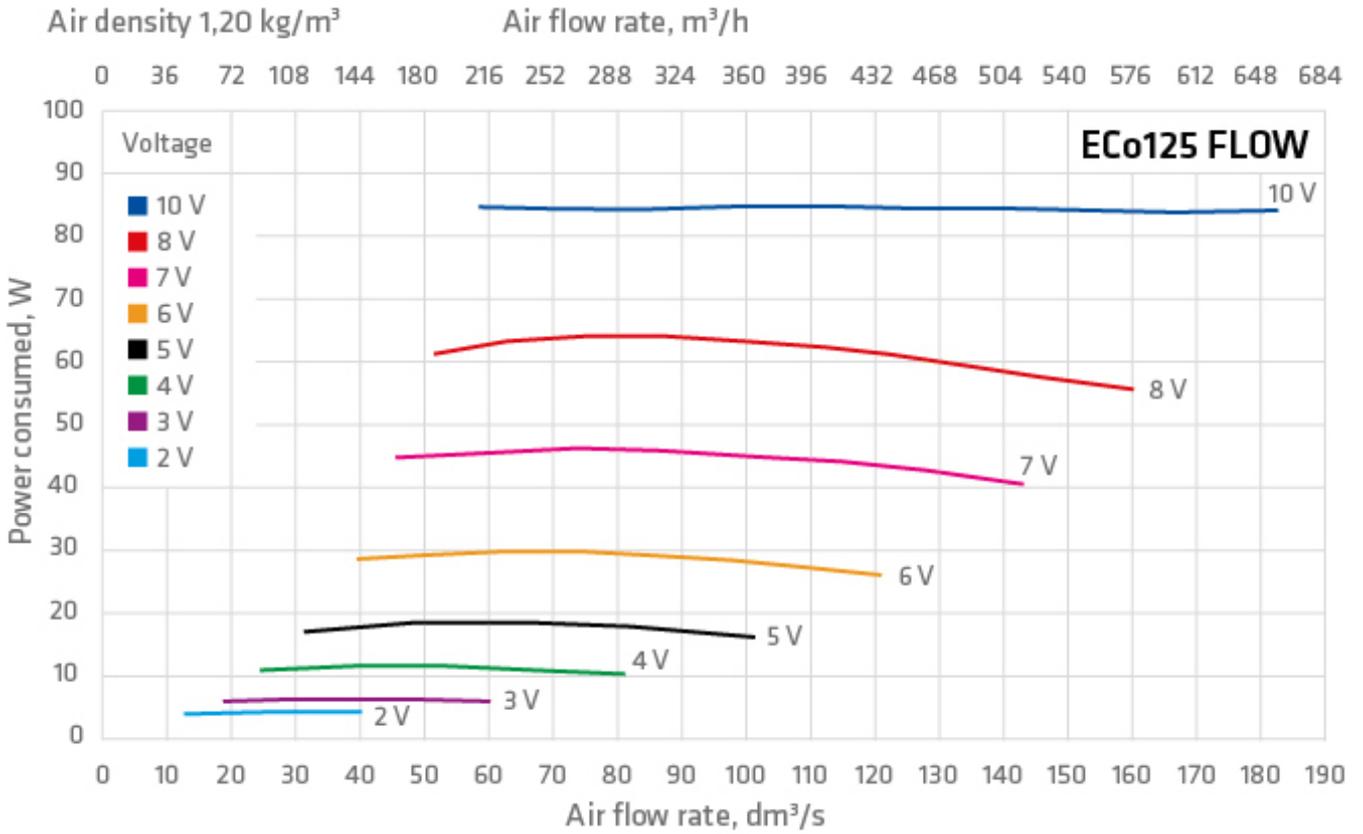



ECO125P/500 FLOW ROOF FAN

ECo125 FLOW


ISO 5801:2017, liitöntätapa C-05

Ilman tiheys 1,20 kg/m³

Nimellinen liitoshalkaisija Ø125 mm

U	V	2	3	4	5	6	7	8	10
qv	dm ³ /s	25.9	38.9	53.0	66.2	86.0	102	112	126
pF	Pa	17.6	32.3	54.2	80.6	94.5	126	159	188
Pe	W	4.1	6.5	11.4	18.8	29.3	45.0	62.0	84.8
N	1/min	766	1088	1446	1786	2129	2488	2770	3069
Duct									
LW63	dB	*	*	*	*	*	77.5	71.7	78.3
LW125	dB	*	55.4	60.1	64.0	68.2	70.7	71.5	72.8
LW250	dB	*	47.5	53.3	59.3	62.2	65.8	67.6	70.0
LW500	dB	*	*	42.5	47.0	50.6	53.9	56.4	58.8
LW1000	dB	*	*	30.0	33.8	38.2	41.6	44.1	46.7
LW2000	dB	*	*	*	*	30.6	34.6	37.4	40.4
LW4000	dB	*	*	*	*	*	32.4	36.3	40.1
LW8000	dB	*	*	*	*	*	32.0	35.8	39.5
LW	dB	*	*	*	*	71.2	78.5	75.5	79.9
LWA	dB(A)	*	*	48.0	52.5	56.1	59.7	61.1	63.2
Environment									
LW63	dB	*	*	44.7	47.6	50.4	52.3	54.7	56.3
LW125	dB	38.2	43.9	48.9	52.8	56.8	57.6	60.6	61.6
LW250	dB	35.0	42.7	49.0	53.4	58.2	61.3	64.2	66.4
LW500	dB	44.8	48.3	54.4	58.9	62.7	65.6	68.7	70.8
LW1000	dB	43.8	49.7	54.0	57.5	61.4	64.6	67.5	69.8
LW2000	dB	*	41.8	52.7	59.4	64.4	67.1	69.4	71.1
LW4000	dB	*	*	39.4	47.5	54.1	59.2	64.3	67.0
LW8000	dB	*	*	*	37.8	45.5	52.4	56.9	60.5
LW	dB	*	53.7	59.6	64.4	68.8	71.7	74.6	76.7
LWA	dB(A)	46.2	51.8	58.3	63.5	68.1	71.1	74.0	76.1

ECO125P/500 FLOW ROOF FAN

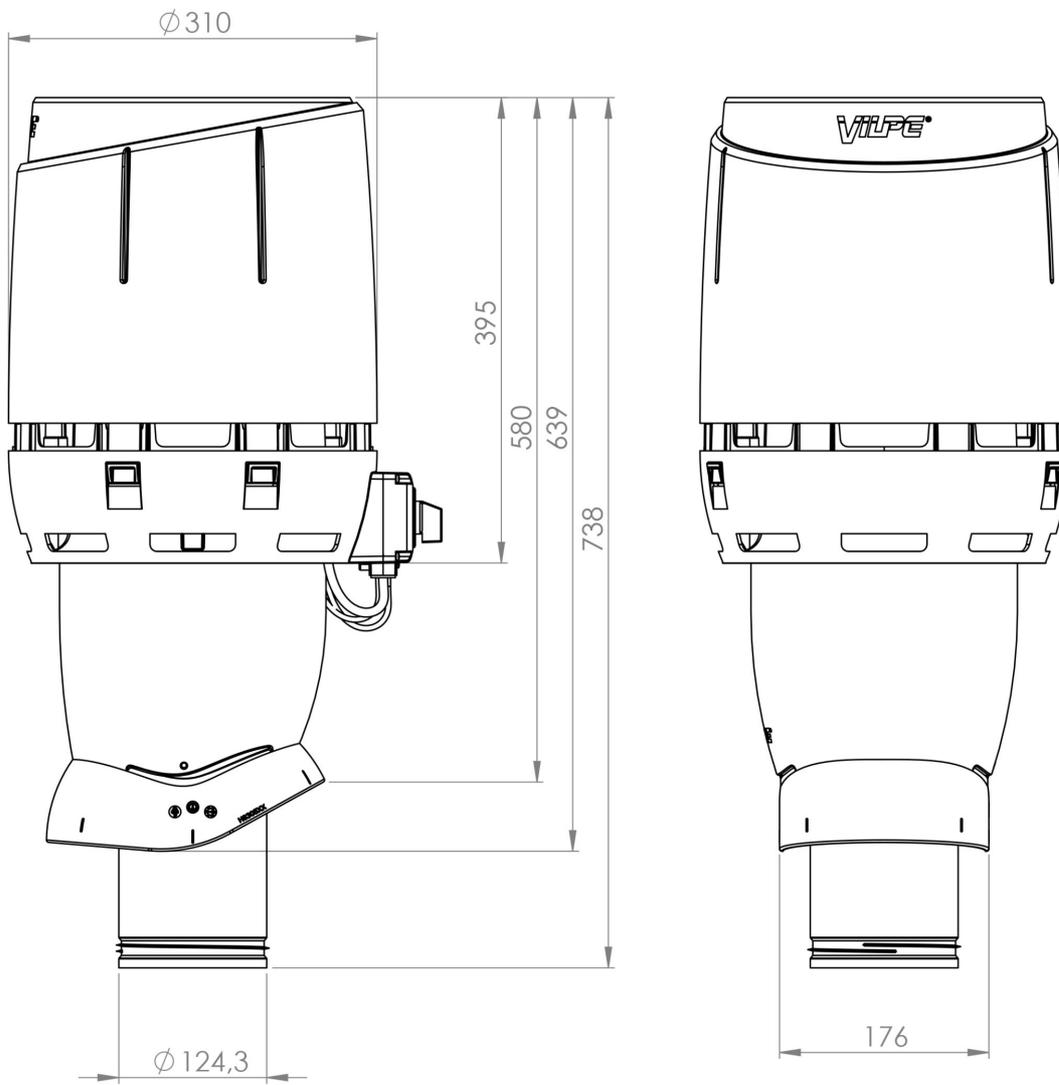

Copyright © 2018 VILPE Oy. All rights reserved.

ECO125P/500 FLOW ROOF FAN

Speed Controller

